


FEATURES

- JPEG real time compression format
- Support 2CH video recording
- Support alarm trigger recording
- Whenever alarm system triggered, video streaming or pictures will be upload notification.
- Support 3G & GPRS system for remote surveillance with mobile phone
- Support TCP/IP, PPPoE, DDNS and DHCP for network connection
- Support DDNS function as a router
- Support NTSC / PAL system
- Support video access by APs (software) or HTML pages (IE explorer)
- Support different PC O/S
- Full alarm-triggered event list for easy search and quick playback
- Support multiple user access levels with security protection
- Support multiple on-line users (up to 5 users)
- Support watch dog function for automatic network reconnection
- ANR will reactivate recording function automatically when network is reconnected
- Easy to upgrade firmware



PANEL

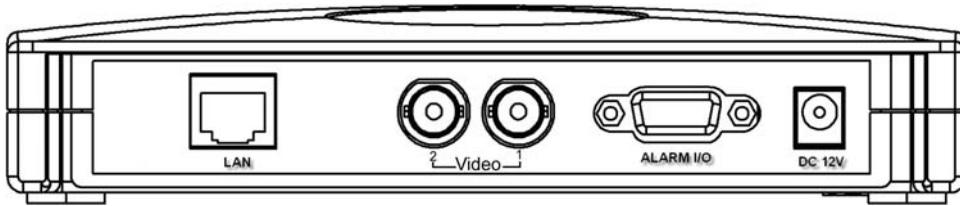

SPECIFICATION

SPECIFICATION	AVC732E
Video Input	2 channel for analog & digital products, 1.0 Vp-p 75 composite, BNC
Alarm Input	4 inputs / 2 outputs
Watch dog	Yes
RS-485 Port	Yes
Network Interface	Ethernet (10/100 Base-T)
Image Compression	JPEG
Video Adjustment	Brightness, Contrast and Hue
Network Connection	Support TCP/IP, PPPoE, DDNS and DHCP for network connection
Protocols	TCP/IP, ICMP, SMTP, FTP, HTTP, DHCP, DDNS, PPPoE, SNTP
Resolution	704x480, 352x240 (NTSC) / 704x576, 352x288 (PAL)
Performance	Video output: Up to 30(NTSC), 25(PAL) frames/ second
Alarm Trigger Recording	Yes
Trigger & Action	Triggered by GPIO Input, Action: E-mail video/images or video/images upload to FTP site's specific accounts
Security	Password Protection
Power Source	DC 12V
Current consumption	500 m A